

SPECIFICATION



A218A99

Single-Head Spotlight Module



ON
OFF


1-10V
DIMMING

DALI 2

Key Parameters


Voltage	AC 220V-240V
Power	20W / 28W
CRI	>90
SDCM	≤5
Color	White / Black / Grey
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	24° / 36° / 50°

24° -3000K-CRI90




H(m)	Ena(x)	D/B(m)
1	11439	0.47/0.47
2	2859	1.94/0.93
3	1271	1.42/1.40
4	741	1.89/1.86
5	457	2.36/2.33

36° -3000K-CRI90



H(m)	Ena(x)	D/B(m)
1	7268	0.66/0.66
2	1817	1.33/1.32
3	807	1.99/1.98
4	454	2.65/2.64
5	290	3.32/3.30


50° -3000K-CRI90



H(m)	Ena(x)	D/B(m)
1	4540	0.84/0.84
2	1135	1.68/1.69
3	504	2.52/2.53
4	283	3.37/3.38
5	181	4.21/4.22

Product Information	20W	28W
Installation	Recessed	
Material	Aluminum	
Painting	Highly pure powder coating	
System Power(W):	20	28
Fixture Lumen Output(lm):	2700	3780
System Efficiency(lm/W):	135	135
LED Driver	Included	Included

Light Source	20W	28W
LED Typology	COB	COB
LED Power (W)	20	28
Lumen Output 3000K CRI 90 (lm):	3200	4500
LED Efficiency (lm/W):	160	160

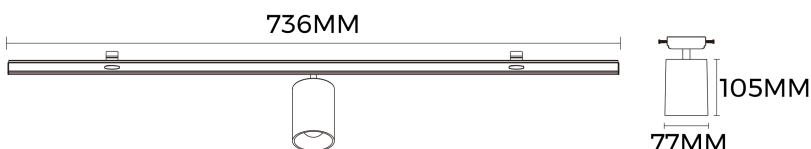

SPECIFICATION



A218A99


Dual-Head Spotlight Module



Key Parameters

Voltage	AC 220V-240V
Power	40W / 56W
CRI	>90
SDCM	≤5
Color	White / Black / Grey
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	24° / 36° / 50°

24° -3000K-CRI90




H(m)	Ena(x)	D/B(m)
1	11439	0.47/0.47
2	2859	1.94/0.93
3	1271	1.42/1.40
4	741	1.89/1.86
5	457	2.36/2.33

Product Information

	40W	56W
Installation	Recessed	
Material	Aluminum	
Painting	Highly pure powder coating	
System Power(W):	40	56
Fixture Lumen Output(lm):	5400	7560
System Efficiency(lm/W):	135	135
LED Driver	Included	Included

36° -3000K-CRI90




H(m)	Ena(x)	D/B(m)
1	7268	0.66/0.66
2	1817	1.33/1.32
3	807	1.99/1.98
4	454	2.65/2.64
5	290	3.32/3.30


Light Source

	20W	28W
LED Typology	COB	COB
LED Power (W)	20	28
Lumen Output 3000K CRI 90 (lm):	3200	4500
LED Efficiency (lm/W):	160	160

50° -3000K-CRI90



H(m)	Ena(x)	D/B(m)
1	4540	0.84/0.84
2	1135	1.68/1.69
3	504	2.52/2.53
4	283	3.37/3.38
5	181	4.21/4.22

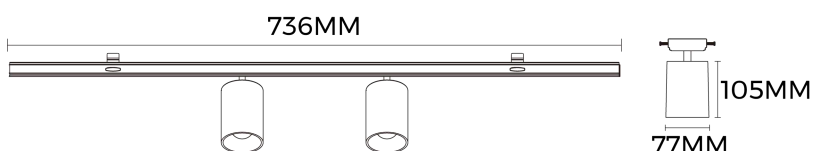

A218A99


Triple-Head Spotlight Module




Key Parameters

Voltage	AC 220V-240V
Power	60W / 84W
CRI	>90
SDCM 3	≤5
Color	White / Black / Grey
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	24° / 36° / 50°


24° -3000K-CRI90

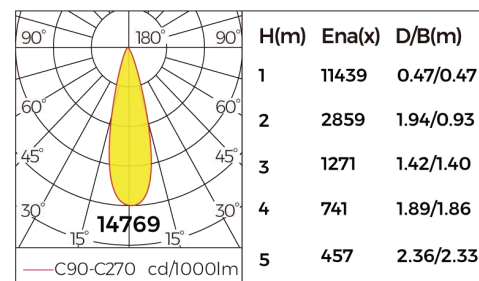

36° -3000K-CRI90

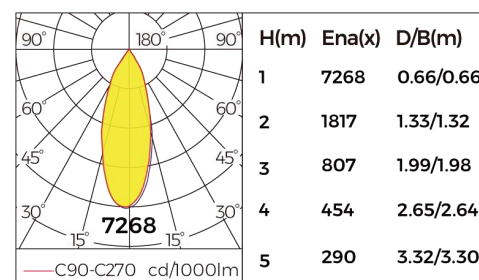

50° -3000K-CRI90

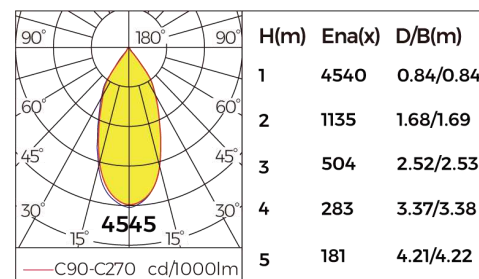

Product Information	60W	84W
Installation	Recessed	
Material	Aluminum	
Painting	Highly pure powder coating	
System Power(W):	40	84
Fixture Lumen Output(lm):	8100	11340
System Efficiency(lm/W):	135	135
LED Driver	Included	Included

Light Source	20W	28W
LED Typology	COB	COB
LED Power (W)	20	28
Lumen Output 3000K CRI 90 (lm):	3200	4500
LED Efficiency (lm/W):	160	160

