

TEST REPORT

Prepared For

TRIECO(HUIZHOU)CO.,LTD

4th FL,3rd Building,Xinghua Industry park,No. 38 Shihua Road West,Dayawan,Huizhou,516083

Model: T06-15AFO-201

Report Type:	Report is prepared for the client above to present the result of measured temperature of samples and projected lumen maintenance life of LED lighting product according to projecting method from IES: IES TM-21-19
Reviewed By:	Hexy He <i>Hexy He</i>
Report Number:	DG3210702-26785E-10
Test Date:	2021-07-06
Report Date:	2021-07-09
Approved by:	Bill Xiong / EE Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan). No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China. Tel: +86-0769-86858888 Fax:+86-0769-86858588

1. General Description

Information of Final Products:

One test sample was in good condition and received on 2021-07-02, and used for testing.

Model Number:	T06-15AFO-201
Model Name:	LED LAMP
Brand Name:	TRIECO
Manufacturer:	TRIECO(HUIZHOU)CO.,LTD
#Rated Voltage:	220-240V, 50/60Hz
#Test Voltage:	230V 50Hz
#Rated Power:	58W
Series-Parallel:	55S 3P
Number of LED chips:	165
Average drive current:	114 mA
Total drive current:	342 mA
Driver Brand:	OSRAM
Driver Model:	OT FIT 35/220-240/350 D CS L

Information of LED Light Source:

Model Number of LED Light Source:	HL-AS-PU2835DW-S1-08-PCT-HR3
Type of LED Components:	LED Package
Manufacturer:	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch
LM-80 Report No:	RSZ170118517-10-9000-M3

2. Standards Used

- IES TM-21-19 Projecting Long Term Lumen Maintenance of LED Light Sources
- ANSI/UL 1598-2008: Standard for Safety of Luminaires
- Annex A of IES LM-84-14 Recommendations for measurement of IN-SITU conditions LED case temperature

3. Test Method

Lumen maintenance life of LED light source and LED lamp or luminaire (if any) is the elapsed operating time over which an LED light source maintains a given percentage of its initial light output. L_{70} in this report is the time (in hours) when the light output from the LED has dropped to 70% of its initial output.

The LED light source is LED package, array, or module which is tested in IES LM-80-15 test report. Final product means LED lamp or luminaire which the LED light source will be included. TMP_{LED} is the temperature of the thermocouple attachment point on the LED light source package as defined by the manufacturer of the LED light source. The *in situ* temperature of LED light source used in final product was used to calculate the lumen maintenance life of final product, if any.

The *in situ* temperature is measured according to ANSI/UL 1598 and IES LM-84 Annex A. The LED which has the highest temperature was measured at the location of LED case which is specified by LED source manufacturer and detailed by LM-80 report. The hottest LED was found by the following procedure:

An IR thermography may be used to find the hottest LEDs. Or if the layout of PCB is symmetrical, the hottest LED should be at the center or close to the center of the array. Or in question, more than one TMP should be measured to find out the hottest LED. The case temperature of the hottest LED source at *in situ* condition is reported and is used to project L_{70} life time.

The reported temperature value for each point should be the readings of the hybrid recorder after the temperature of each point is stabilized and constant. A temperature is considered constant if the test has been running for at least 3 hours; and three successive readings, taken at 15-minute intervals, are within 1 degree C of one another and are not rising. Or the test was run for a minimum of 7.5 h. Ambient temperature variations above or below 25 °C have been respectively subtracted from or added to temperatures recorded at points on the device.

The drive current of LED package/module/ array was calculated as the total output current of the driver measured by multimeter, divided by the number of branches in parallel of LEDs.

The calculation of the L₇₀ life is according to IES TM-21-19.

4. Test Equipment

Device	Manufacture	Model No	Serial No	Calibration date	Calibration due date
Multimeter	FLUKE	17B	1573 1328	2020-10-30	2021-10-29
Hybrid Recorder	YOKOGAWA	DR240	10#	2021-02-24	2022-02-23
AC POWER SUPPLY	HengPu	HPA 1103	0003394	2021-01-04	2022-01-03
Thermography	FLIR	E60	49037877	N/A	N/A



Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

5. In situ Temperature and Driver Current Measurements of Final Product

IR thermograph from hot PCBAs of Sample



Temperature measurement point on TMP_{LED}

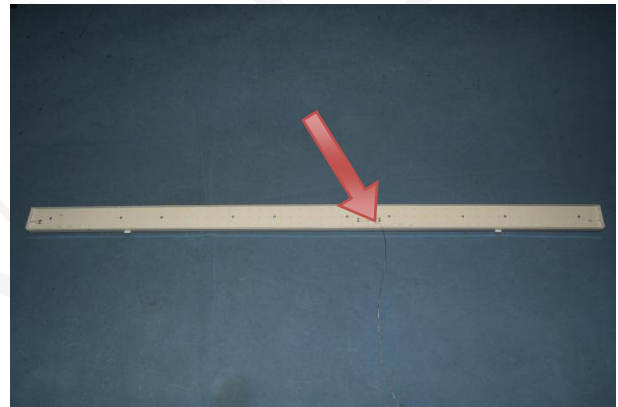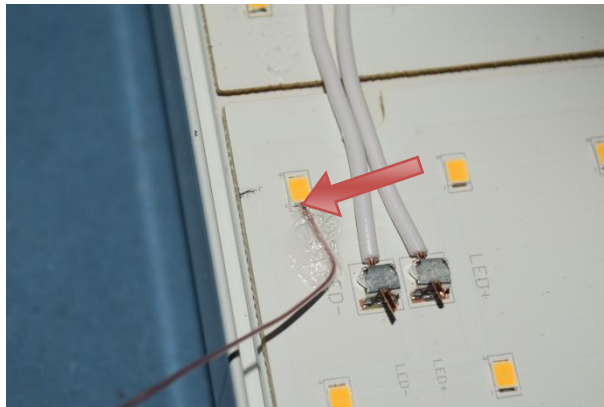

Temperature Measurement Data

Test Condition

Ambient Temperature: 25°C±5°C

Relative Humidity: 45 %

Supply voltage: 230V 50Hz

Type of thermocouples: T

Test Duration: ≥3.5Hours

Test Result

Hottest TMP_{LED}: 54.4 °C

Forward Current(I_F): 114 mA



6. Lumen Maintenance Data of LED Light Source from LM-80 Report

Test Data for 85°C Case Temperature		Test Data for 115°C Case Temperature	
Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)
1000	99.98	1000	99.78
2000	99.74	2000	99.50
3000	99.48	3000	99.22
4000	99.23	4000	98.93
5000	98.98	5000	98.64
6000	98.72	6000	98.34
7000	98.60	7000	98.09
8000	98.42	8000	97.82
9000	98.17	9000	97.53

7. Calculate Result of Life Time Projection

Temperature Interpolation at 54.4 °C (projection based on in-situ temperature entered)	
$T_{s,1}$ (°C)	85.00
$T_{s,1}$ (K)	358.15
α_1	2.055E-06
B_1	1.000
$T_{s,2}$ (°C)	-
$T_{s,2}$ (K)	-
α_2	-
B_2	-
E_a/k_b	-
A	-
B_0	1.000
$T_{s,i}$ (°C)	54.40
$T_{s,i}$ (K)	327.55
α_i	2.055E-06
Reported $L_{90}(9k)$ at 54.4 °C (hours)	51,000

8. Final Product Photo

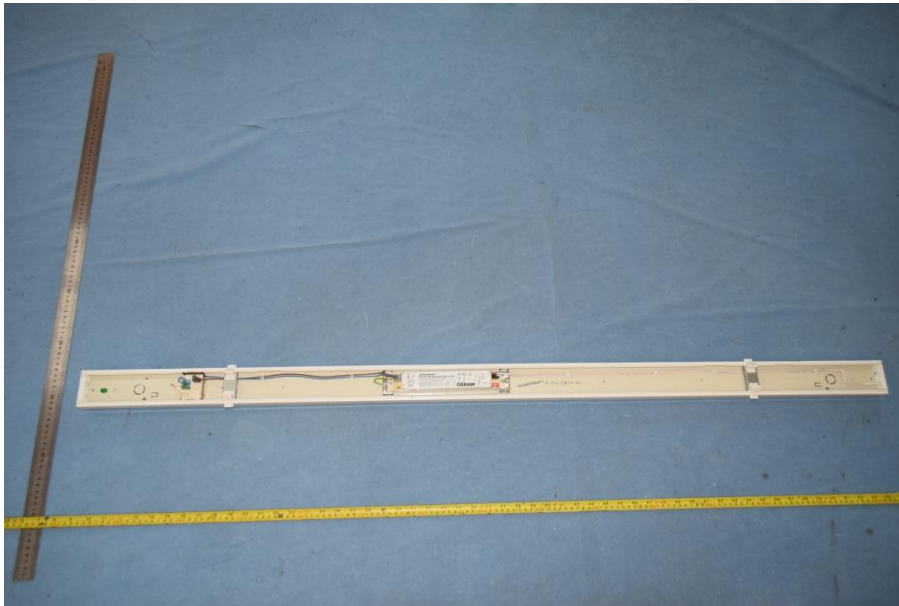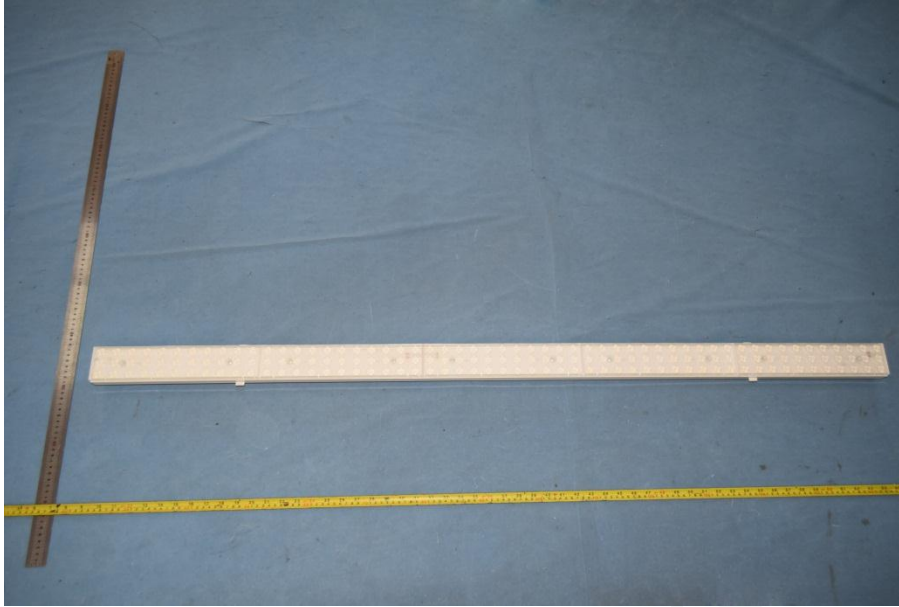

Directions

1. The information marked "superscript #" is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95 confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****END OF REPORT*****